


Clés mâles hexagonales coudées

BN 1169 - A: métriques; B: UNC/UNF

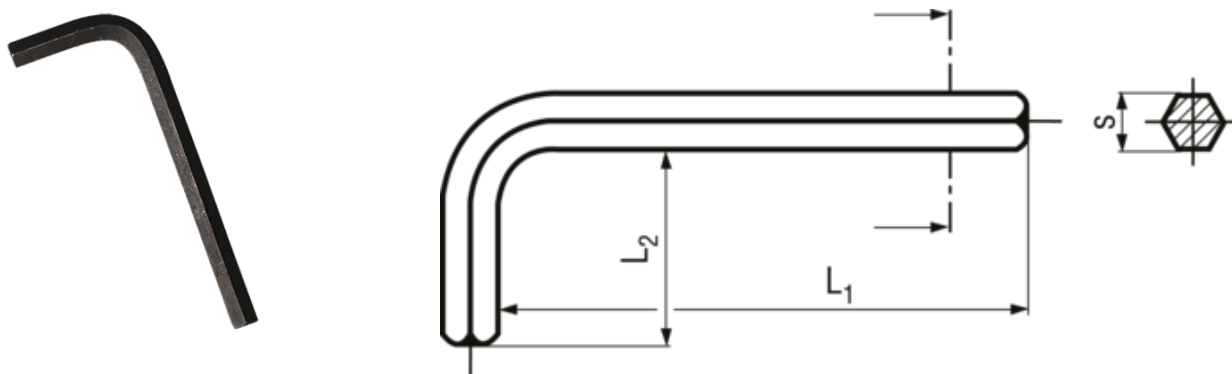

Entraînement	Six pans creux
Matière	Acier
Version de matériau	trempe
Surface	noirci
Exécution	A: métriques; B: UNC/UNF
Standard	DIN 911 (Norme abrogée), ~ISO 2936, ~UNI 6753

type B UNC/UNF: ne sont pas dans DIN 911, 30: selon ISO 2936

Article n°	s	Type	Tolérance	L1	L2
1380869	0.7	A	0,011 / -0,002	32	6
1380931	0.9	A	-0,011 / -0,024	32	10
1380478	1.3	A	-0,030 / -0,056	40	12
1380605	1.5	A	0 / -0,025	45	14
1380613	2	A	0 / -0,04	50	16
1411047	2.5	A	0 / -0,04	56	18
1411055	3	A	0 / -0,04	63	20
1411063	4	A	0 / -0,048	70	25
1411071	5	A	0 / -0,048	80	28
1411098	6	A	0 / -0,048	90	32
1411101	7	A	0 / -0,058	95	34
1411128	8	A	0 / -0,058	100	36
1411136	9	A	0 / -0,058	112	40
1411144	10	A	0 / -0,058	112	40
1411152	12	A	0 / -0,110	125	45
1411160	14	A	0 / -0,11	140	56

Article n°	s	Type	Tolérance	L1	L2
1411179	17	A	0 / -0,11	160	63
1411187	19	A	0 / -0,13	180	70
1411195	22	A	0 / -0,13	200	80
1411209	24	A	0 / -0,13	224	90
1411217	27	A	0 / -0,13	250	100
1411225	30	A	0 / -0,16	280	112
1411233	32	A	0 / -0,16	315	125
1411241	36	A	0 / -0,16	355	140
1411268	0,05"	B		42	13.5
1411276	1/16"	B		44	13.5
1411284	5/64"	B		47	15.5
1411292	3/32"	B		51	16.5
1411306	1/8"	B		57	19
1411314	5/32"	B		64	21.5
1411322	3/16"	B		70	24
1411330	7/32"	B		76	26
1411349	1/4"	B		83	29
1411357	5/16"	B		95	32
1411365	3/8"	B		108	35
1411373	1/2"	B		133	41
1411381	9/16"	B		146	45
1411403	5/8"	B		159	48
1411411	3/4"	B		184	54
1411438	1"	B		237	69